Quick Install Guide
D-LINK *AIR* DCF-650W
11 Mbps Wireless LAN Compact Flash Adapter

For use with Handheld or Pocket PCs with Windows CE in an "Ad Hoc" or "Infrastructure" network. ***This guide is for installation purposes only. Please see your User's Manual for more detailed information.***

Contents of Package:



- DCF-650W 11Mbps Wireless LAN Compact Flash Card
- Quick Install Guide
- Pocket PC Utility Program

If any of the above items are missing, please contact your reseller.

Before you start make sure that:

You have installed **"Microsoft Active Sync"** software on your computer or laptop and a connection has been established between the computer and the PDA.
Please make sure that you have installed **Microsoft Active Sync software** on your laptop. This is the software that came with your PDA.

Note: For more information on synchronizing your PDA to your computer, please review the User's manual that came with your PDA.


1 Installing the DCF-650W Drivers

- **Insert** the driver CD that came with your DCF-650W into the CD-ROM drive on your computer.

- **Run DCF-650WLAN_PocketPC.exe** to install the driver and utility with the PDA in the cradle.
  Note*: When asked for location, select default installation location.*

Installing the DCF-650W Drivers *Continued….*

Click **Next** to continue

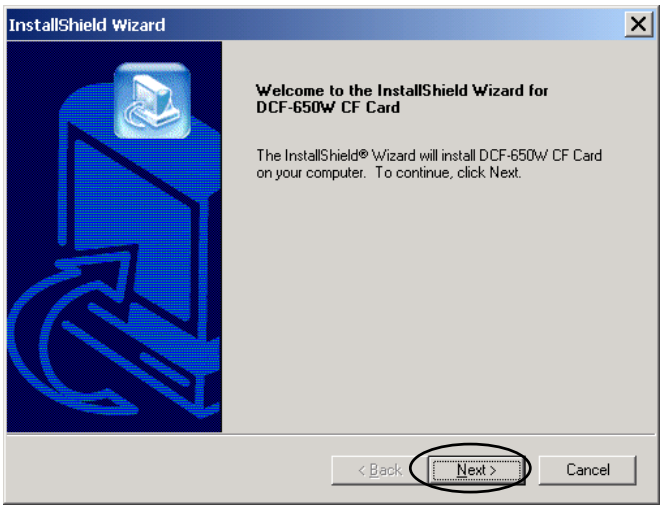


Click **Yes** and continue



Click **OK** to continue



Click **Finish** to finish the installation

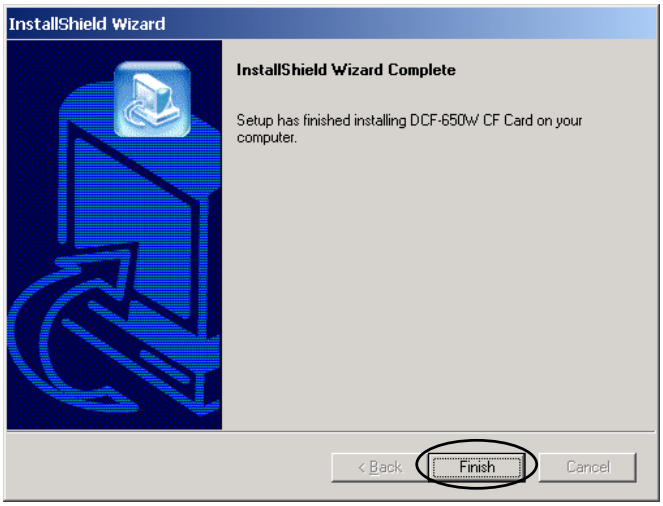

2 Inserting the DCF-650W Compact Flash Adapter

Remove the PDA from the cradle and turn off the unit.

Gently insert the ***DCF-650W Compact Flash Adapter*** into the Compact Flash card slot in your PDA. Now turn on the PDA. The PDA will auto-detect the ***DCF-650W Compact Flash Adapter*** and auto-install the corresponding driver.

Go to Start, Settings, System and tab on DCF-650W CF Card icon.
Configure the parameters for your wireless environment.

Go to Start, Settings, Connections and tab on Network icon. Pick D-Link DCF-650W. You can now either pick a server assign IP address (via DHCP) or use a specific IP address (Static IP).



The **DCF-650W Wireless Compact Flash Adapter** is a "ready-to-use" device. Its default settings are compatible with a typical **Infrastructure Wireless LAN.** If you choose to adjust the settings, please see the "Wireless LAN Settings" section of the User's Manual.

TROUBLESHOOTING

Problem: WinCE returns to the prior application upon restarting.
You can exit the application (for instance, the Utility program) by using the PDA reset button.

Problem: The wireless connection to the Access Point disconnects.
Reset and force a connection by going to the "Utility" program>select "Config.">check parameters>select "Modify" to force a re-connection.

Problem: The PDA "roams" to a new Access Point in a different subnet.

1. Unplug and re-insert the Wireless LAN Compact Flash Adapter
2. "Hard" reset your device to force a "release and renew" of a re-assignment of the IP Address in a DHCP Access Point environment.

CONTACTING TECHNICAL SUPPORT

You can find the most recent software and user documentation on the **D-Link** website.

D-Link provides free technical support for customers within the United States during the warranty period on this product.

U.S. customers can contact D-Link Technical Support through our web site, or by phone.

D-Link Technical Support over Telephone:
(800) 758-5489
24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

http://support.dlink.com

Building Networks for People
Version 2.0